

## PSA Oxygen Generator

# AS-P



AirSep Alpha-Series Oxygen Generators produce from 20 to 5,000 cubic feet of oxygen per hour at up to 95.5% oxygen concentration. When electricity and a source of compressed air is supplied, these dependable machines can provide oxygen for any application.

## Features

- Produces oxygen from an independent compressed air source
- Microprocessor controlled
- Low operating cost
- Automatic and unattended operation
- Easy to install and maintain
- Optional NEMA 4 Touchscreen control panel with integrated oxygen concentration monitor

## Typical Applications

### Manufacturing

- Cutting/Brazing/Soldering
- Thermal/Chemical Oxidation

### Medical

- Hospital Systems

### Environmental

- Ozone (Generator) Feed Gas
- Environmental Remediation
- Waste/Water Treatment

### Glass Industry

- Glass Work/Manufacturing/Blowing

### Additional


- Fish Farming

## Specifications


### AS-P

Product Characteristics	
Product Flow	2,000 - 2,300 SCFH (52.58 - 60.46 Nm <sup>3</sup> /hr or 943 - 1,085 LPM) <sup>1</sup>
Product Pressure	45-65 psig (310-448 kPa) <sup>1</sup>
Product Concentration (nominal)	93%
Product Dew Point	-100°F (-73°C)
Dimensions (W x D x H) (nominal)	85 x 64 x 111 in (216 x 163 x 282 cm)
Weight	6,250 lb (2,835 kg)
Physical Connections	
Compressed Air Inlet	1½" FNPT
Product Gas Outlet	¾" FNPT
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 104°F (40°C)
Feed Air Requirements	Flow Rate: <i>Refer to chart on reverse page.</i> Clean and Dry "Plant Air" (Class 5.6.5 per ISO 8573.1) Pressure: 90 psig (621 kPa) minimum Temperature: 122°F (50°C) maximum
Control Power Requirements (Single Phase)	120 V ~ ±10%, 50/60 Hz, 3.0 A or 220 V ~ ±10%, 50/60 Hz, 1.0 A
660 Gallon Oxygen Receiver Characteristics	
Dimensions (Dia. x H)	49 x 129 in (125 x 328 cm)
Weight	1,300 lb (590 kg)

<sup>1</sup> SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F / Nm<sup>3</sup> (Normal cubic meter) gas measured at 1 atmosphere and 0°C / LPM (Liters per minute) gas measured at 1 atmosphere and 21°C

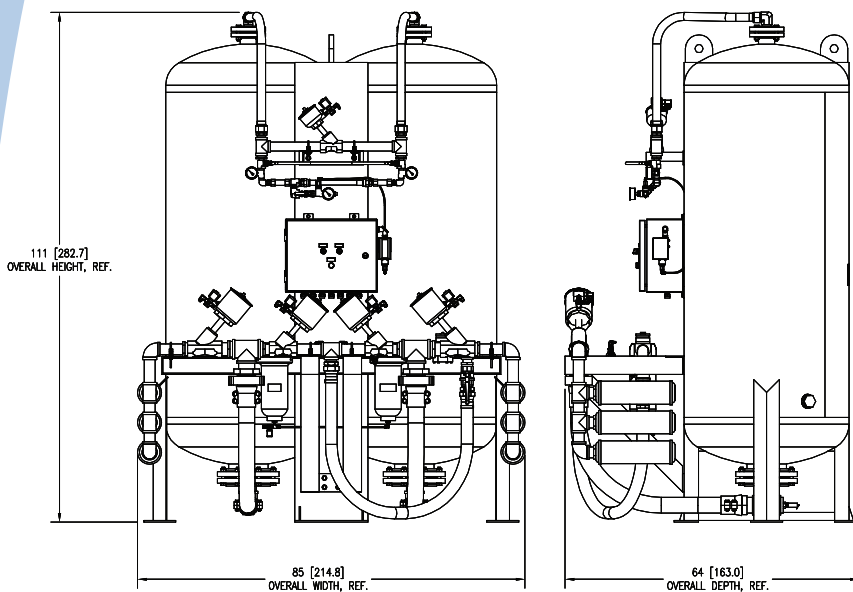

Note: All dimensions are nominal.

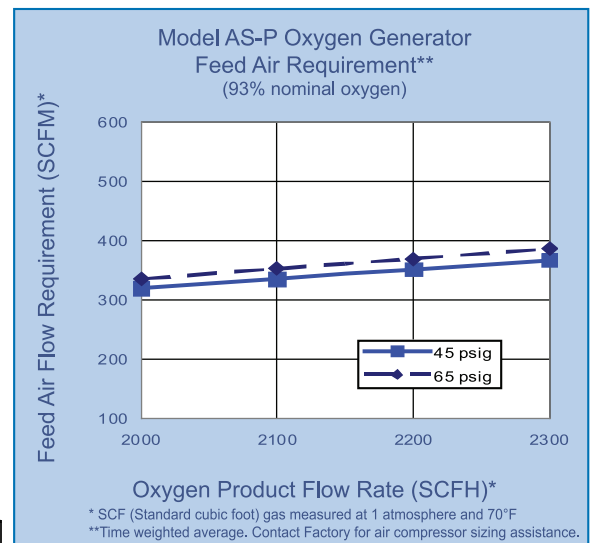

## Ordering Information

Model	Part Number	Description
AS-P	AS093-1	120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-2	220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-3	With NEMA 4 Pressure Switch, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-4	With NEMA 4 Pressure Switch, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-7	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-8	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-10	With NEMA 4 Pressure Switch/ Local Remote ON/OFF, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-11	With NEMA 4 Pressure Switch/ Local Remote ON/OFF, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-12	With oxygen concentration monitor (LED indicator), 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS093-13	With oxygen concentration monitor (LED indicator), 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
Accessories	TA079-1	660 Gallon Oxygen Receiver
Shipping Information		AS-P
		660 Gallon Oxygen Receiver
Class	92.5	70
Commodity Classification Number	8421.39.8040	7311.00.0000
Dimensions (W x D x H)	88 x 114 x 72 in (224 x 290 x 183 cm) with Filter and Pallet	44 x 132 x 50 in (112 x 335 x 127 cm)
Gross Weight	6,710 lb (3,044 kg) with Filter and Pallet	1,500 lb (680 kg)

### Warranty: 1 Year Parts and Factory Labor\*\*\*

\*\*\* An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

<sup>1</sup> Specify oxygen flow and pressure at time of order.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.

Copyright (C) 2014 Chart Industries

CAIRE Inc./Chart SeQual Technologies Inc./Chart Inc./AirSep Corp. reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence. All rights not expressly stated herein are reserved by us, as applicable.

**AIRSEP®**

A Chart Industries Company

260 Creekside Drive

Buffalo, NY 14228-2075 U.S.A.

Tel: (716) 691-0202 • Fax: (716) 691-1255

www.airsepcpd.com • cpd@airsep.com

ML-IND0018 C